




ATLANTIC
Fluid Tech

SECTION 24


Cavities and
Technical
Drawings

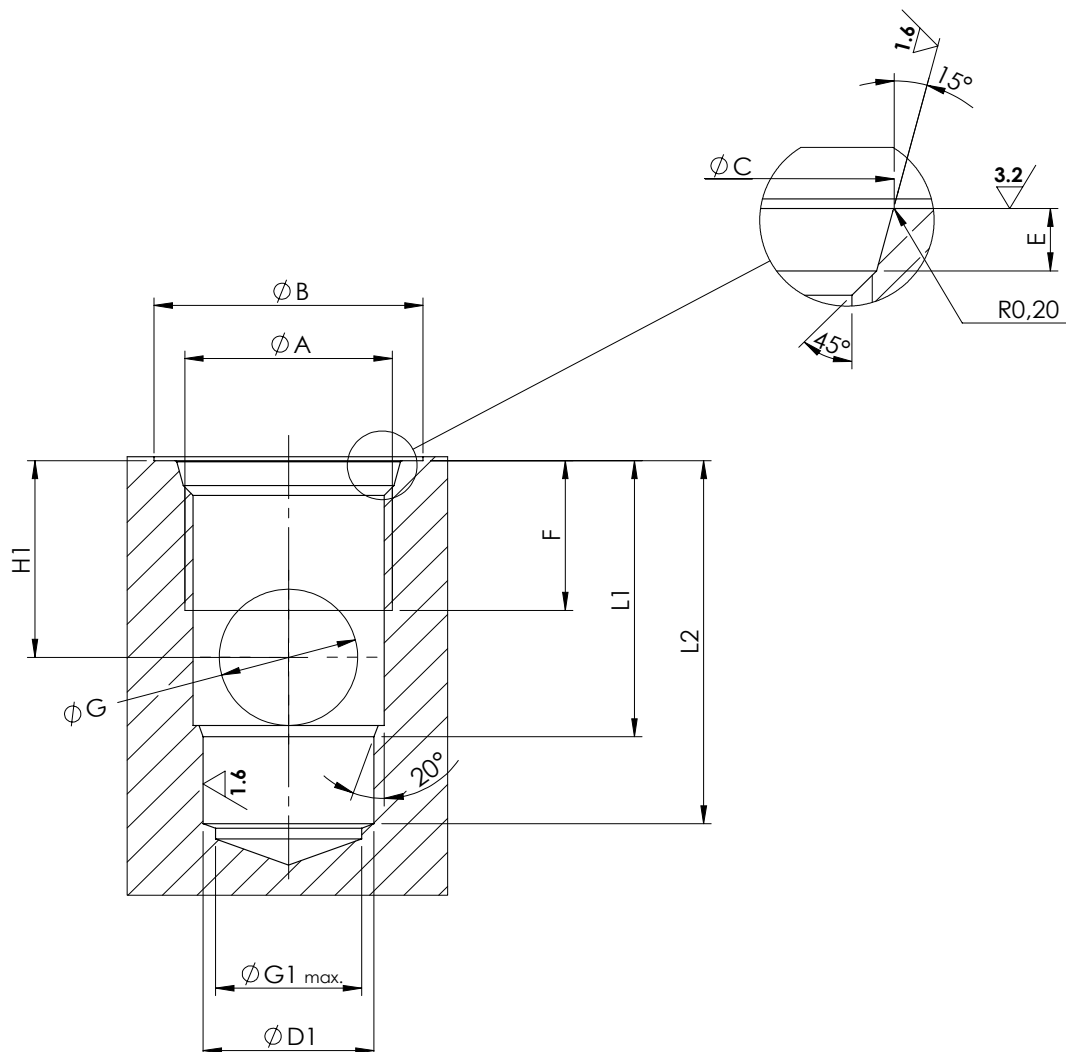

General tolerances : 0.3mm

⊙	0.03
⊥	0.02


	SAE-08-2N	SAE-10-2N	SAE-12-2N	SAE-16-2N	SAE-20-2N
A	3/4-16 UNF	7/8-14 UNF	1-1/16 12 UNF	1-5/16 12 UNF	1-5/8 12 UNF
B	26	30	35	42	48
C	20.6 ^{+0,1} ₀	23.9 ^{+0,1} ₀	29.2 ^{+0,1} ₀	35.5 ^{+0,1} ₀	43.5 ^{+0,1} ₀
D1	12.7 ^{+0,05} ₀	15.87 ^{+0,05} ₀	22.22 ^{+0,05} ₀	28.60 ^{+0,05} ₀	36.52 ^{+0,05} ₀
E	2.6 ^{+0,3} ₀	2.6 ^{+0,3} ₀	3.3 ^{+0,3} ₀	3.3 ^{+0,3} ₀	3.4 ^{+0,3} ₀
F	13	15	20	20	22
G	9	12	18	19	25
G1	12	15	19	24	30
H1	14	18	26	25	32
L1	20.5	25.5	36.5	36	44.5
L2	29	34.5	48	49	59

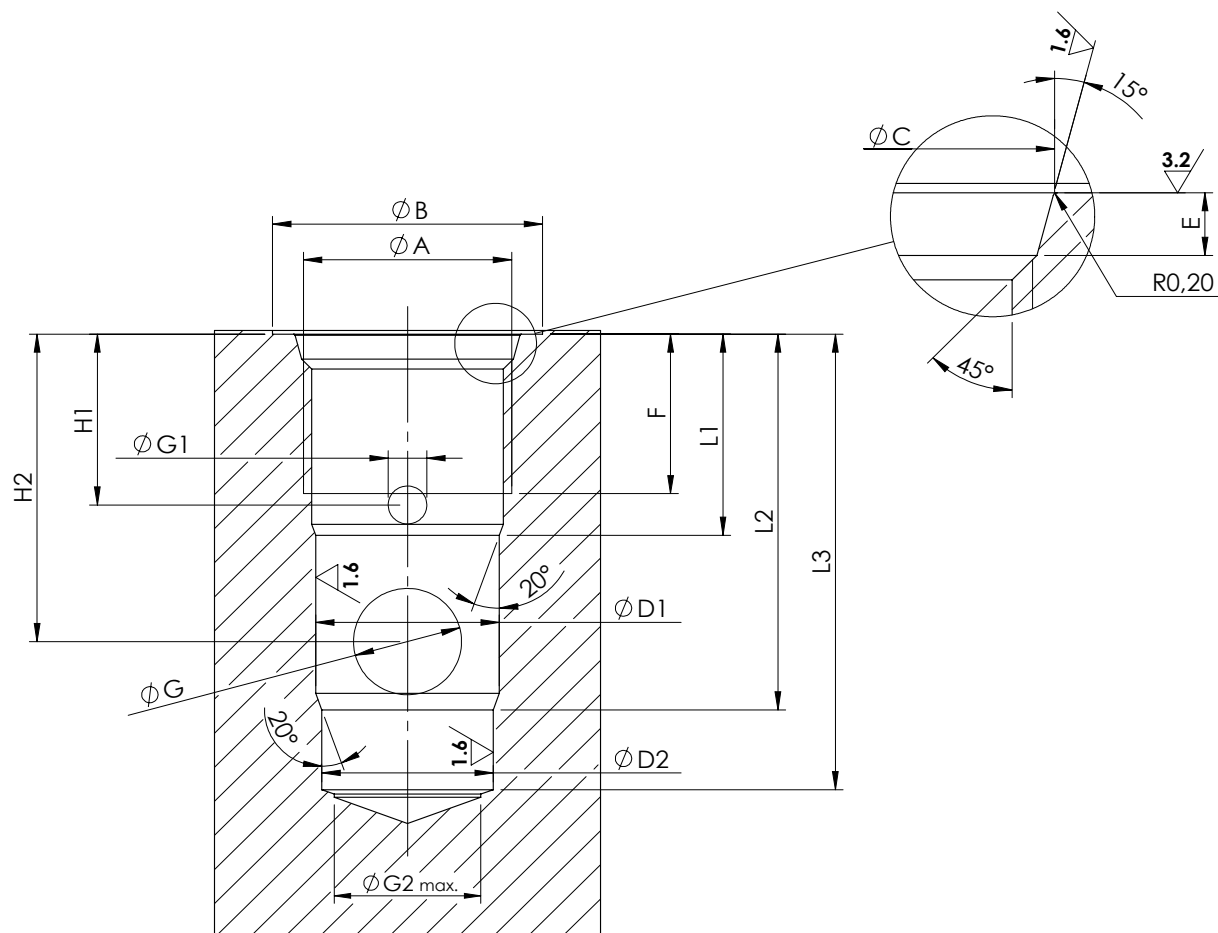

General tolerances : 0.03 mm

	0.03
	0.02


	SAE-08-3C	SAE-10-3C	SAE-12-3C	SAE-16-3C	SAE-20-3C
A	3/4-16 UNF	7/8-14 UNF	1-1/16 12 UNF	1-5/16 12 UNF	1-5/8 12 UNF
B	26	30	35	42	48
C	20.6 ^{+0.1} ₀	23.9 ^{+0.1} ₀	29.2 ^{+0.1} ₀	35.5 ^{+0.1} ₀	43.5 ^{+0.1} ₀
D1	15.87 ^{+0.05} ₀	19.05 ^{+0.05} ₀	23.80 ^{+0.05} ₀	28.6 ^{+0.05} ₀	36.52 ^{+0.05} ₀
D2	14.27 ^{+0.05} ₀	17.47 ^{+0.05} ₀	22.22 ^{+0.05} ₀	25.42 ^{+0.05} ₀	33.35 ^{+0.05} ₀
E	2.6 ^{+0.3} ₀	2.6 ^{+0.3} ₀	3.3 ^{+0.3} ₀	3.3 ^{+0.3} ₀	3.4 ^{+0.3} ₀
F	12	13	21	16.5	20
G	8	14	14	15	28
G1	3	4	5	5	7
G2	12	15	19	24	30
H1	12.5	14	22.5	17.5	20
H2	26.5	31.5	40.5	38	50
L1	16	18	26.5	22	25.5
L2	32	40	49.5	47.5	65.5
L3	40	49	60	58	78

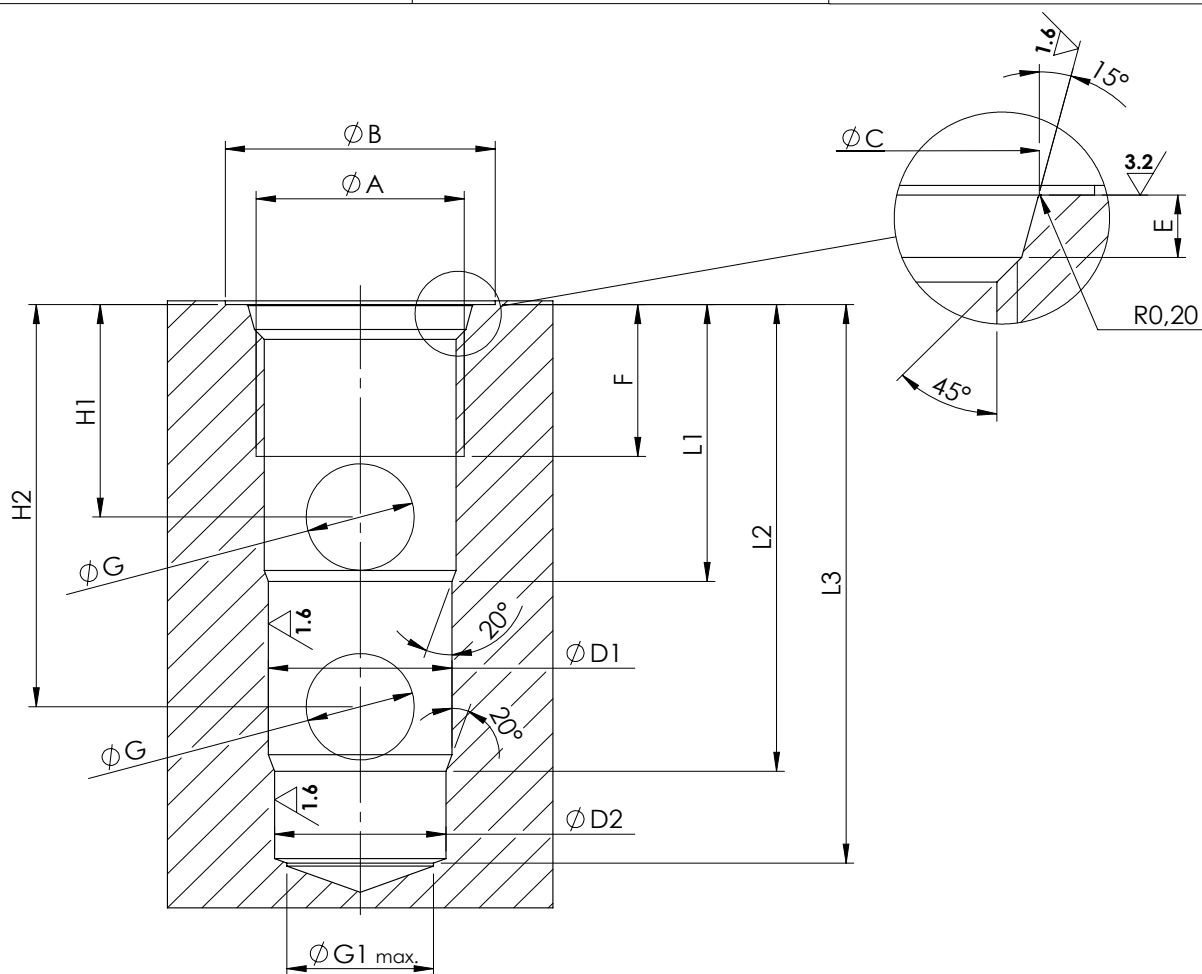

General tolerances : 0.03 mm

⊙	0.03
⊥	0.02

	SAE-08-3N	SAE-10-3N	SAE-12-3N	SAE-16-3N	SAE-20-3N
A	3/4-16 UNF	7/8-14 UNF	1-1/16 12 UNF	1-5/16 12 UNF	1-5/8 12 UNF
B	26	30	35	42	54
C	20.60 ^{+0,1} ₀	23.90 ^{+0,1} ₀	29.20 ^{+0,1} ₀	35.50 ^{+0,1} ₀	43.5 ^{+0,1} ₀
D1	15.87 ^{+0,05} ₀	17.47 ^{+0,05} ₀	23.80 ^{+0,05} ₀	28.60 ^{+0,05} ₀	36.52 ^{+0,05} ₀
D2	14.27 ^{+0,05} ₀	15.87 ^{+0,05} ₀	22.22 ^{+0,05} ₀	27.00 ^{+0,05} ₀	33.35 ^{+0,05} ₀
E	2.6 ^{+0,3} ₀	2.6 ^{+0,3} ₀	3.3 ^{+0,3} ₀	3.3 ^{+0,3} ₀	3.4 ^{+0,3} ₀
F	13	14	20	20	22
G	6	8	14	17	25
G1	12	15	19	24	30
-	-	-	-	-	-
H1	15	18	28	25.5	32
H2	29	34	53	54	72
L1	19.50	23.5	36.5	35.5	46
L2	33.50	39.50	61.50	64	86
L3	43	48.50	73	75	100

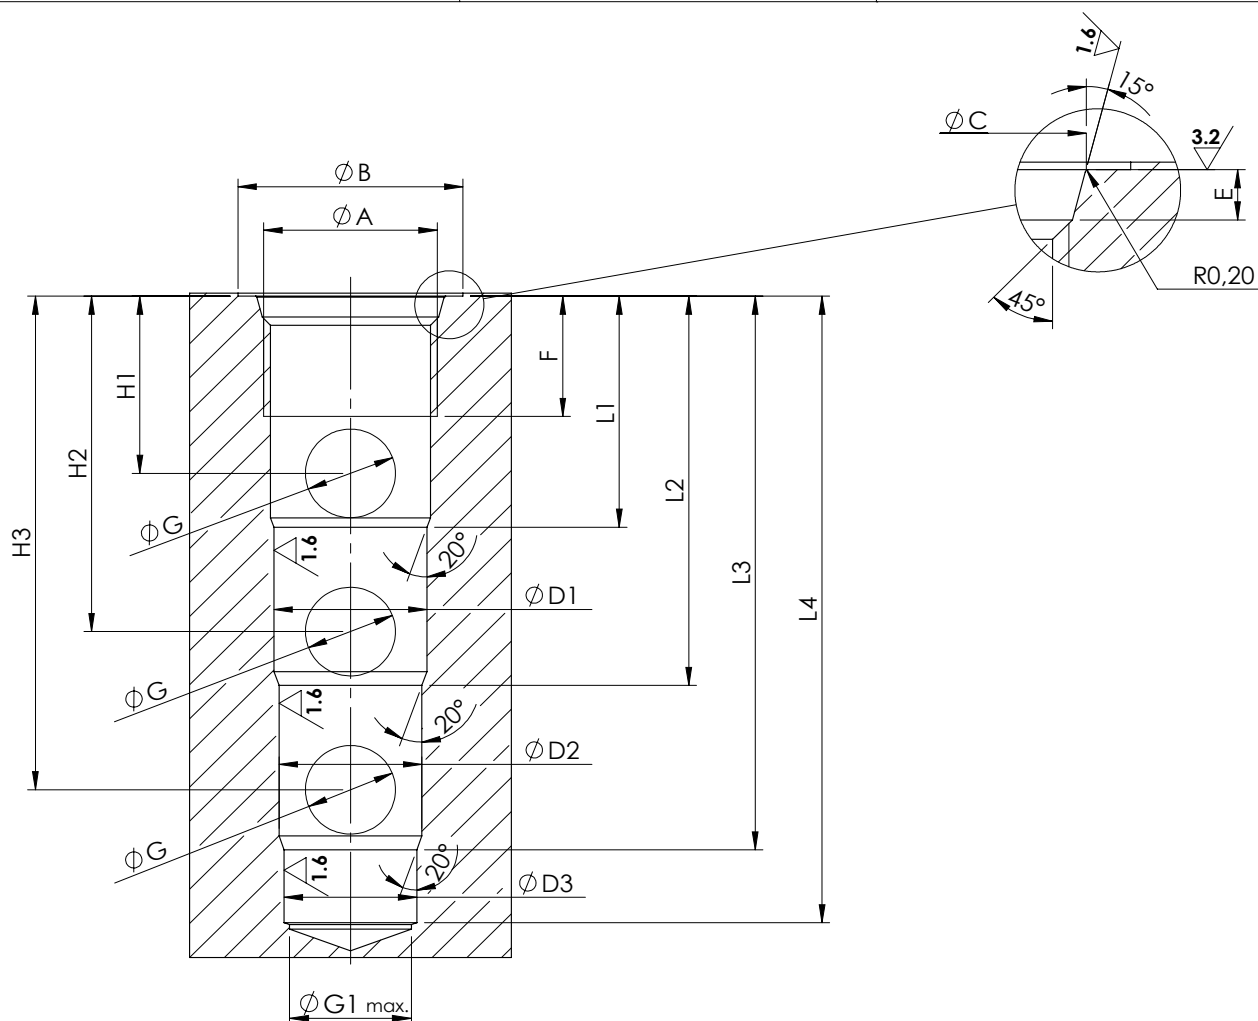


General tolerances: 0.03 mm


	0.03
	0.02

	SAE-08-4N	SAE-10-4N	SAE-12-4N	SAE-16-4N	SAE-20-4N
A	3/4-16 UNF	7/8-14 UNF	1-1/16 12 UNF	1-5/16 12 UNF	1-5/8 12 UNF
B	26	30	35	42	48
C	20.60 ^{+0.1} ₀	23.90 ^{+0.1} ₀	29.20 ^{+0.1} ₀	35.50 ^{+0.1} ₀	43.5 ^{+0.1} ₀
D1	15.87 ^{+0.05} ₀	19.05 ^{+0.05} ₀	23.80 ^{+0.05} ₀	28.60 ^{+0.05} ₀	36.52 ^{+0.05} ₀
D2	14.27 ^{+0.05} ₀	17.47 ^{+0.05} ₀	22.22 ^{+0.05} ₀	27.00 ^{+0.05} ₀	33.35 ^{+0.05} ₀
D3	12.7 ^{+0.05} ₀	15.87 ^{+0.05} ₀	20.62 ^{+0.05} ₀	25.42 ^{+0.05} ₀	31.75 ^{+0.05} ₀
E	2.6 ^{+0.3} ₀	2.6 ^{+0.3} ₀	3.3 ^{+0.3} ₀	3.3 ^{+0.3} ₀	3.4 ^{+0.3} ₀
F	13	15	19	20	22
G	6	8	14	16	25
G1	12	15	19	24	30
H1	15	18	28	25	32
H2	29	34	53	53.5	72
H3	43	50	78	82	114
L1	19.5	23.5	36.5	35.5	46
L2	33.5	39.5	61.5	64	87
L3	47.5	55.5	87.5	92.5	128.5
L4	56	64.5	99	104	142


VP000005

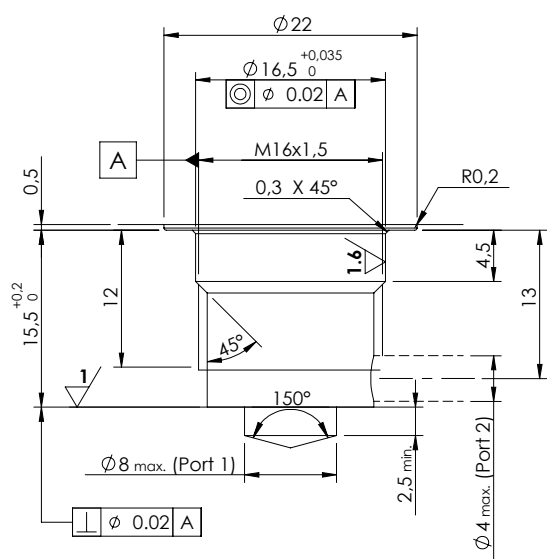


VP000006

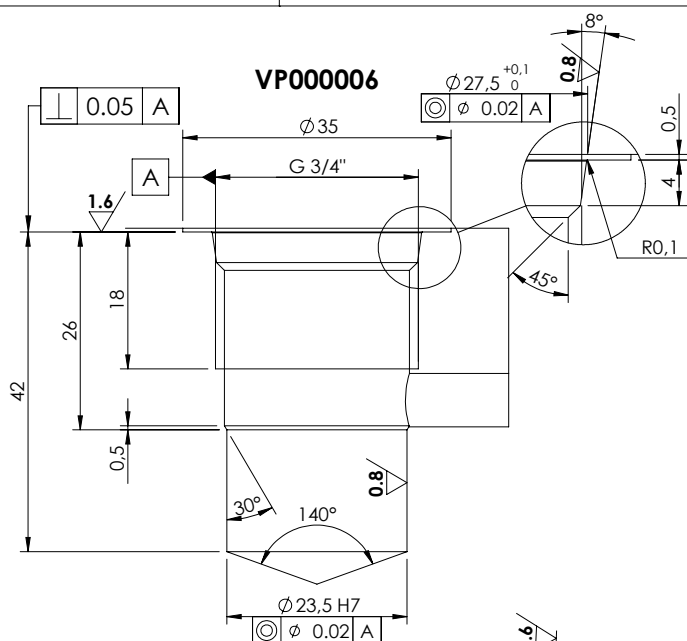


VP000008

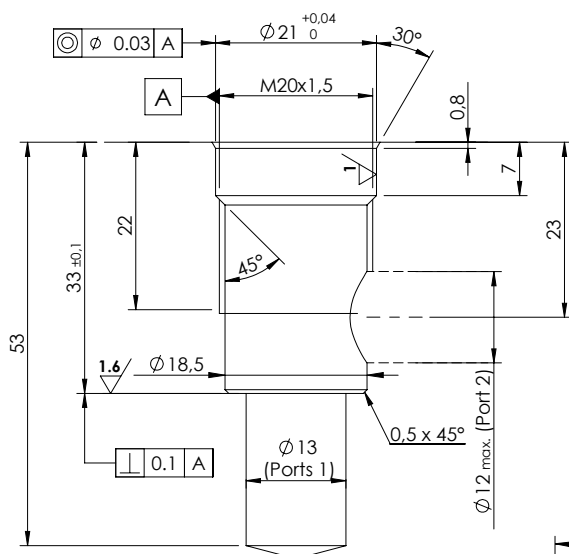


VP000013

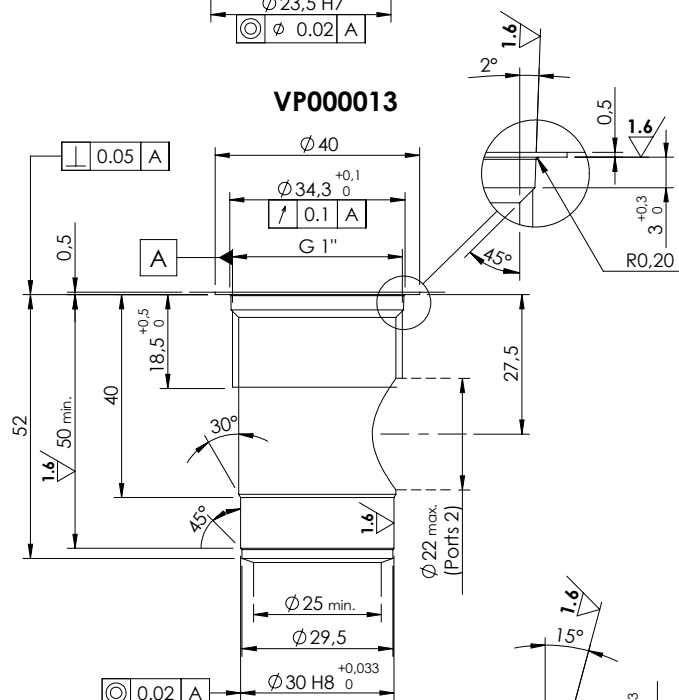

VP000015

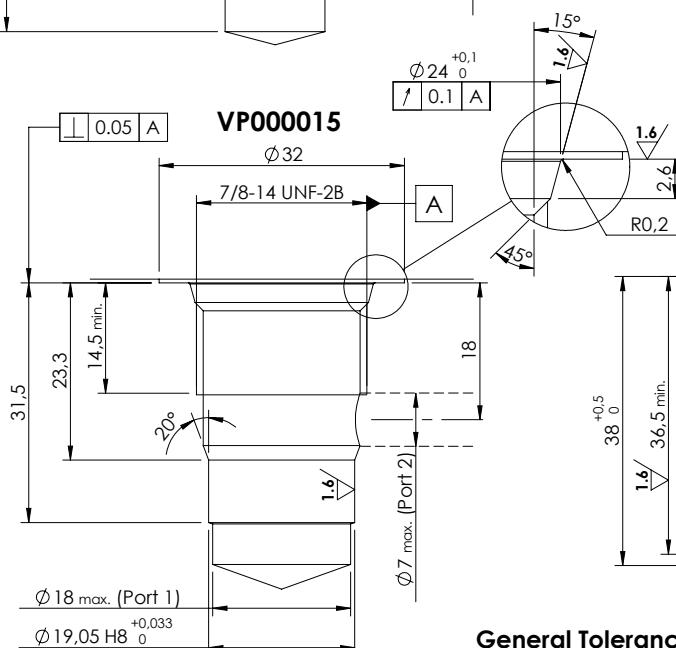


VP000016

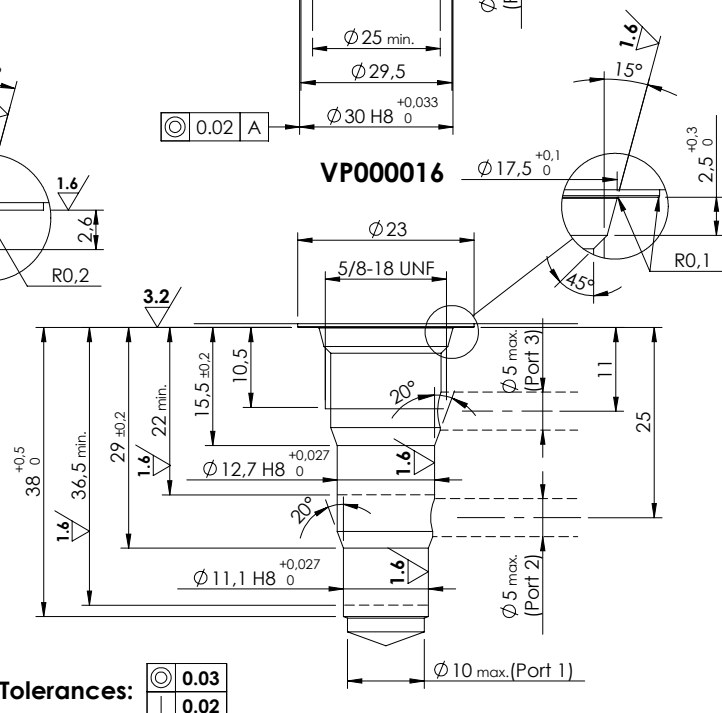


General Tolerances:

	0.03
	0.02


VP000018

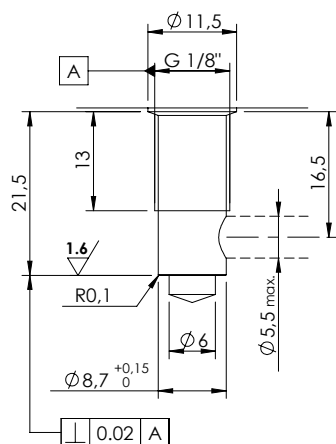


VP000028

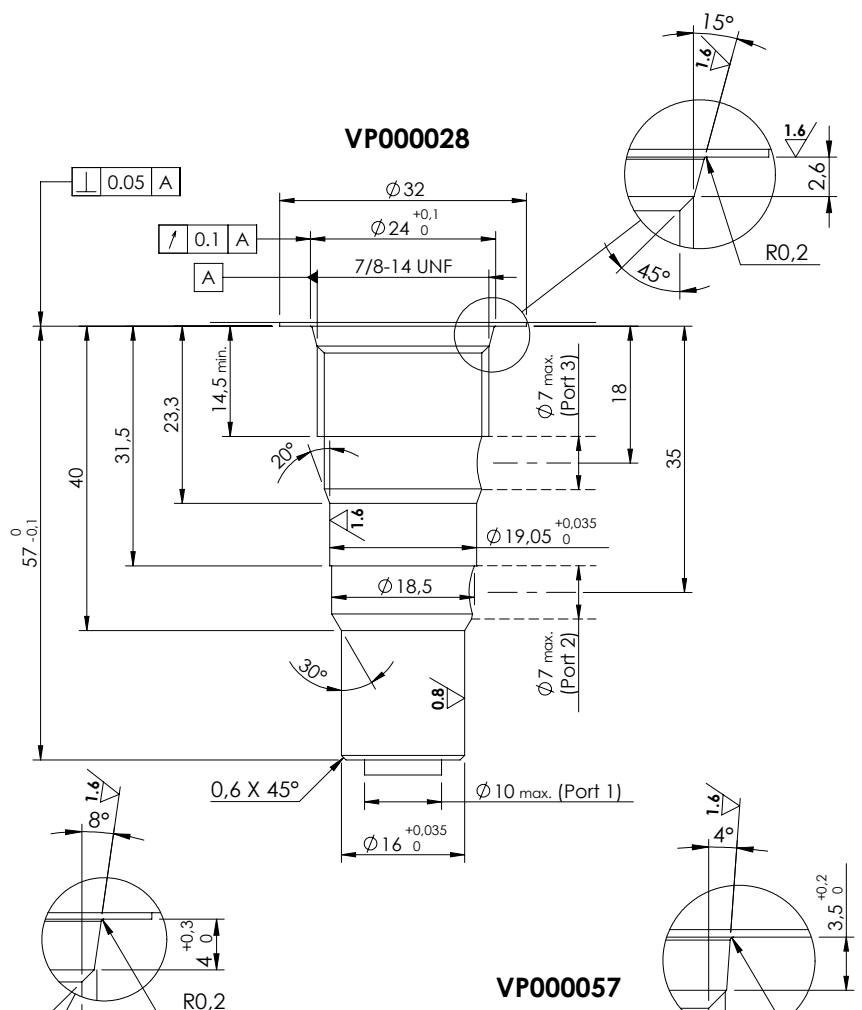

VP000038

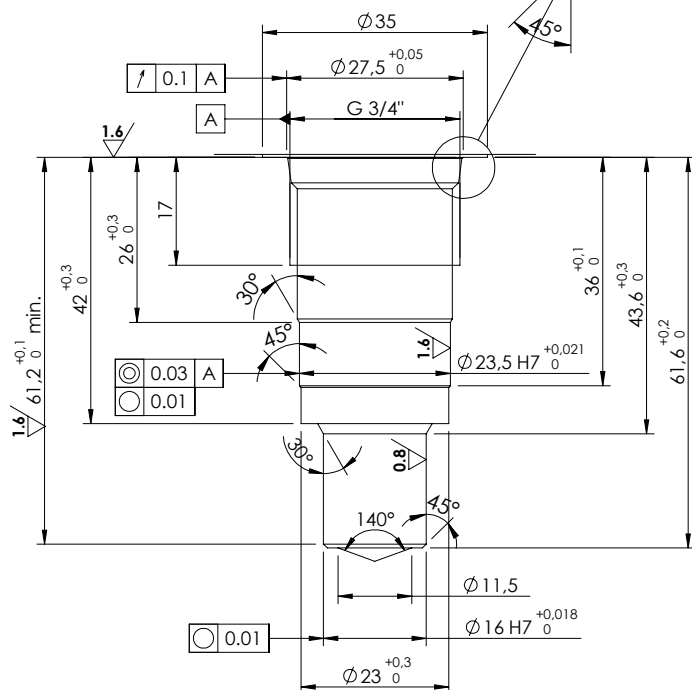


VP000057

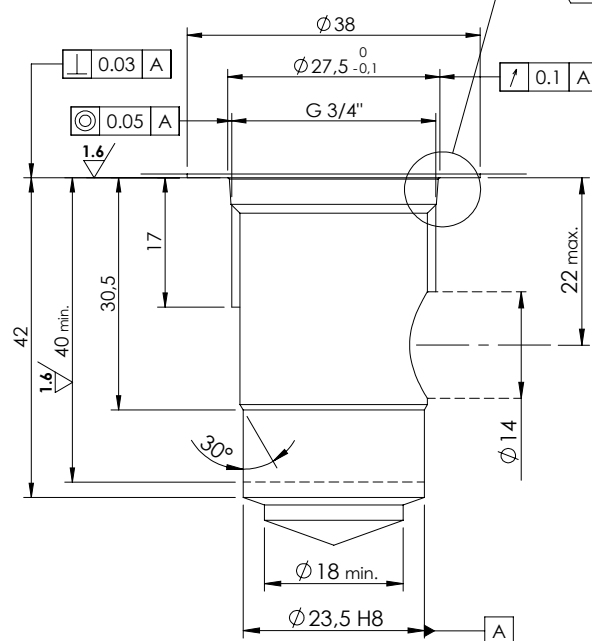


General Tolerances:

ϕ	0.03
$\pm$	0.02


VP000058

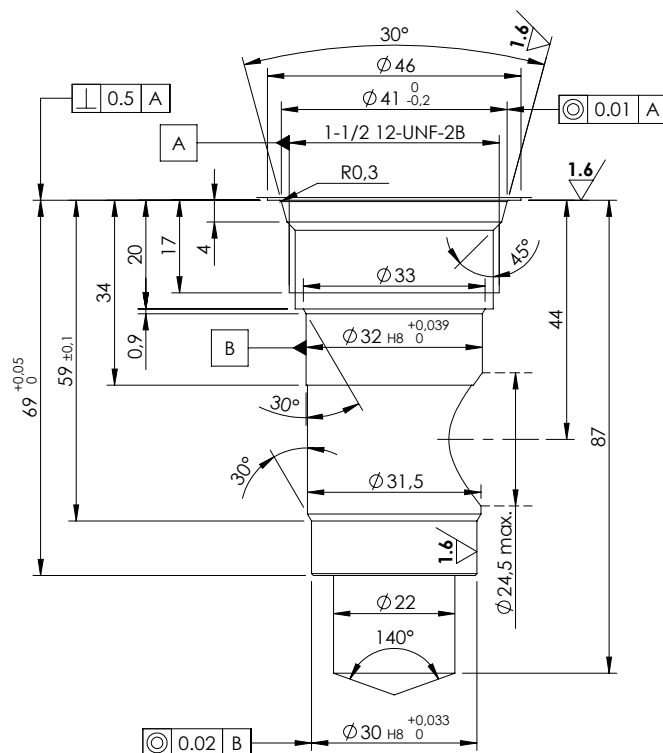

VP000070

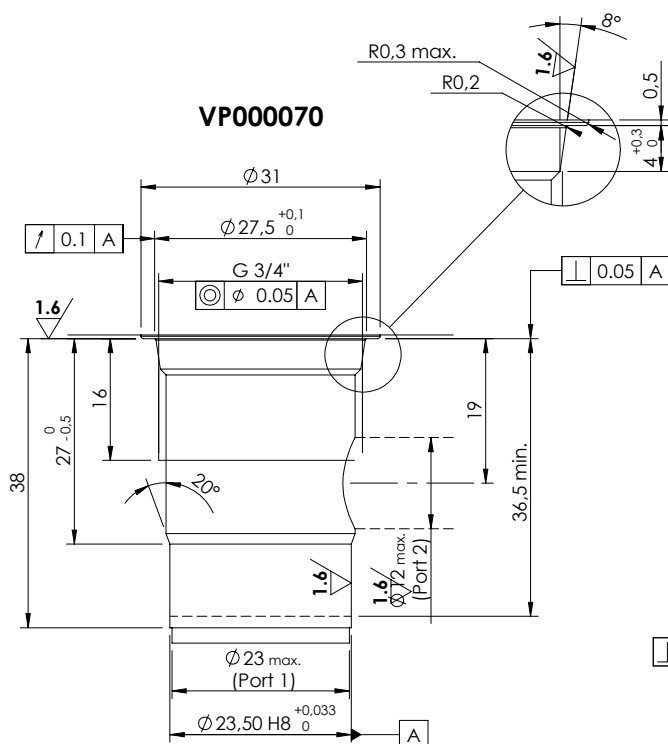


VP000079

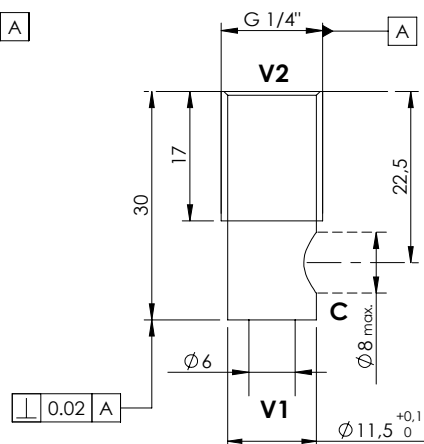


General Tolerances:




VP000080

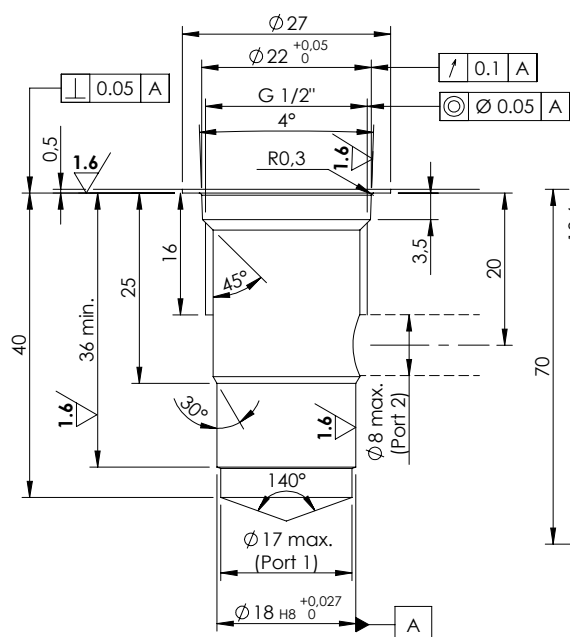


VP000086

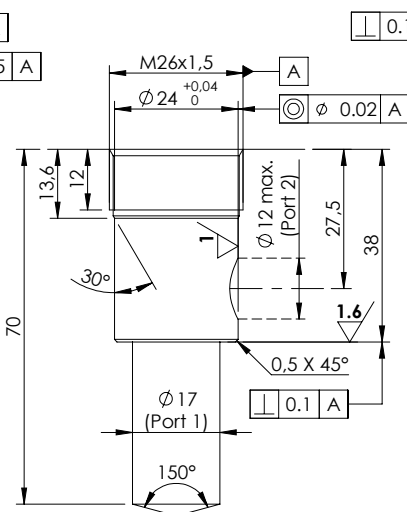


VP000096

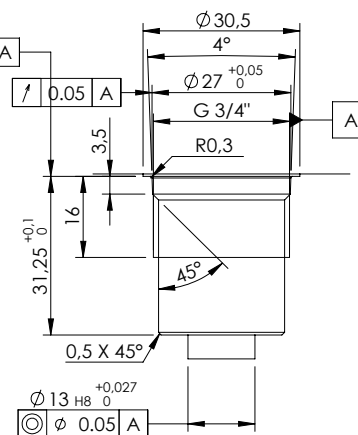


VP000098



VP000120





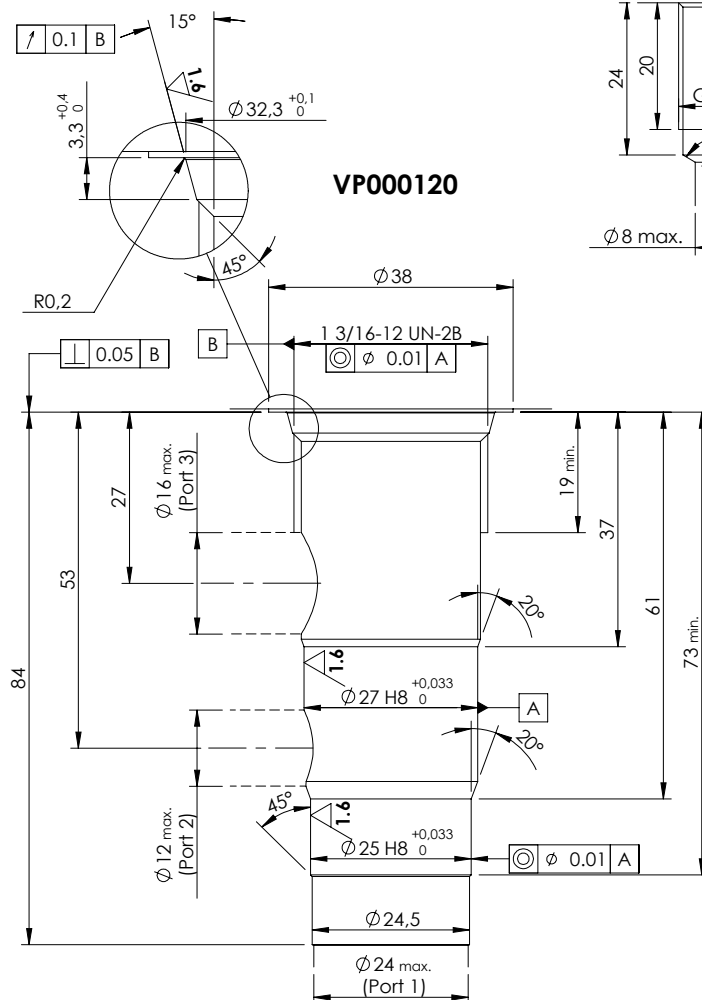


VP000121

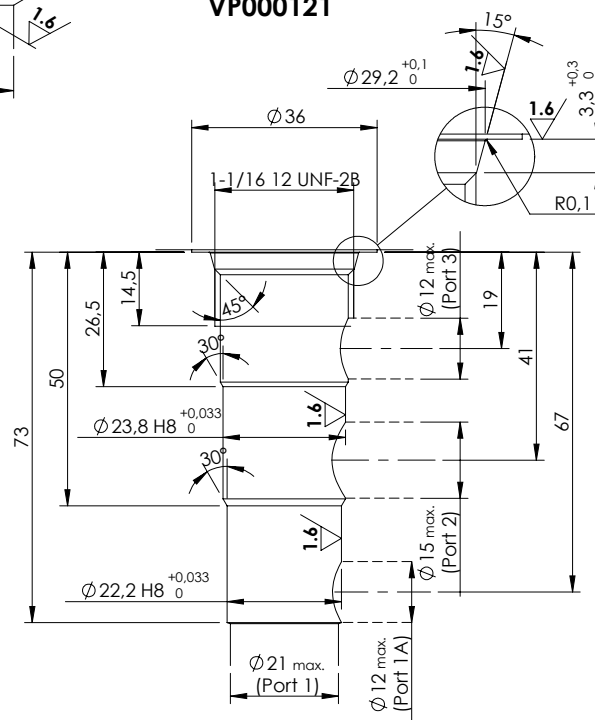

General Tolerances:




	0.03
	0.02

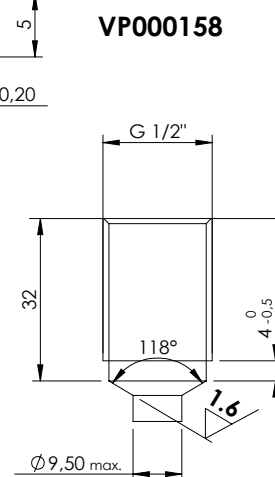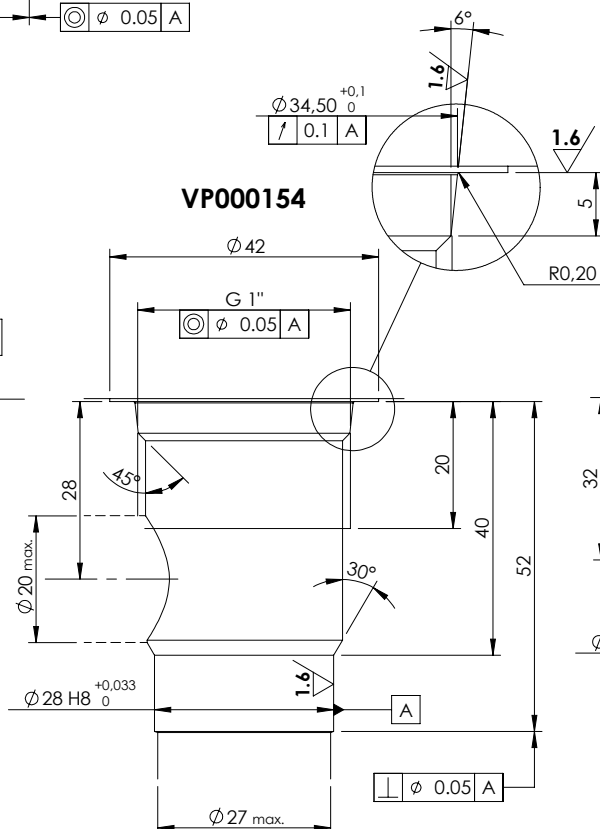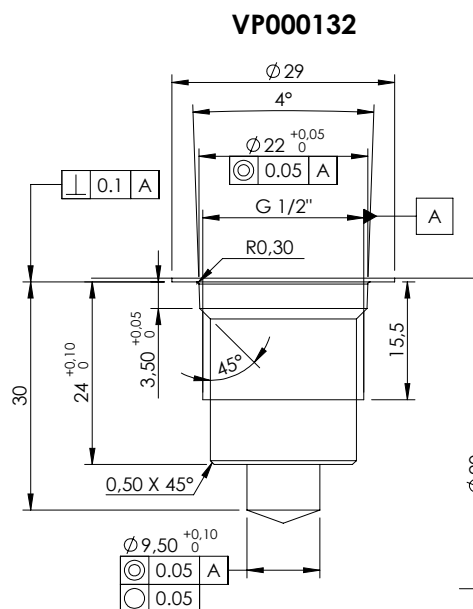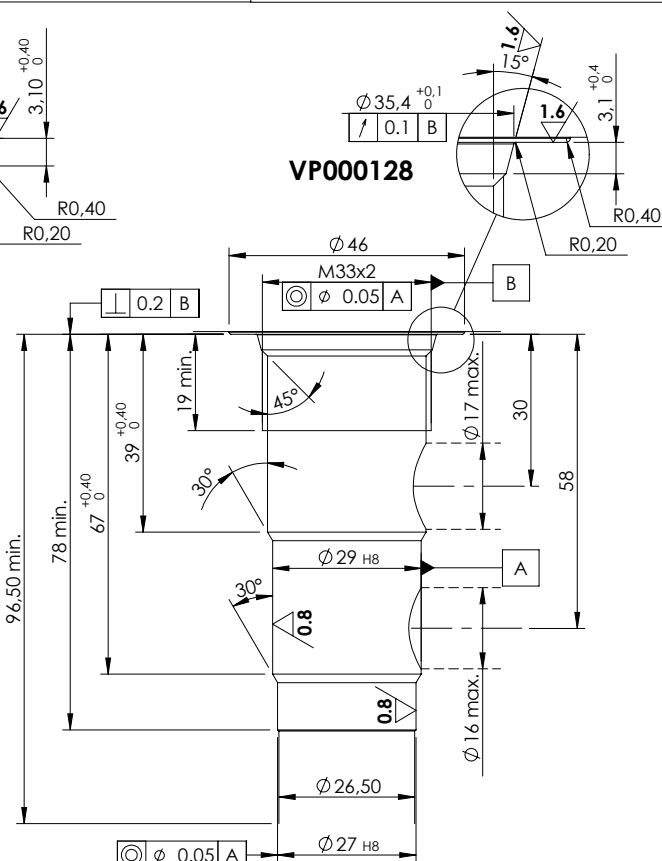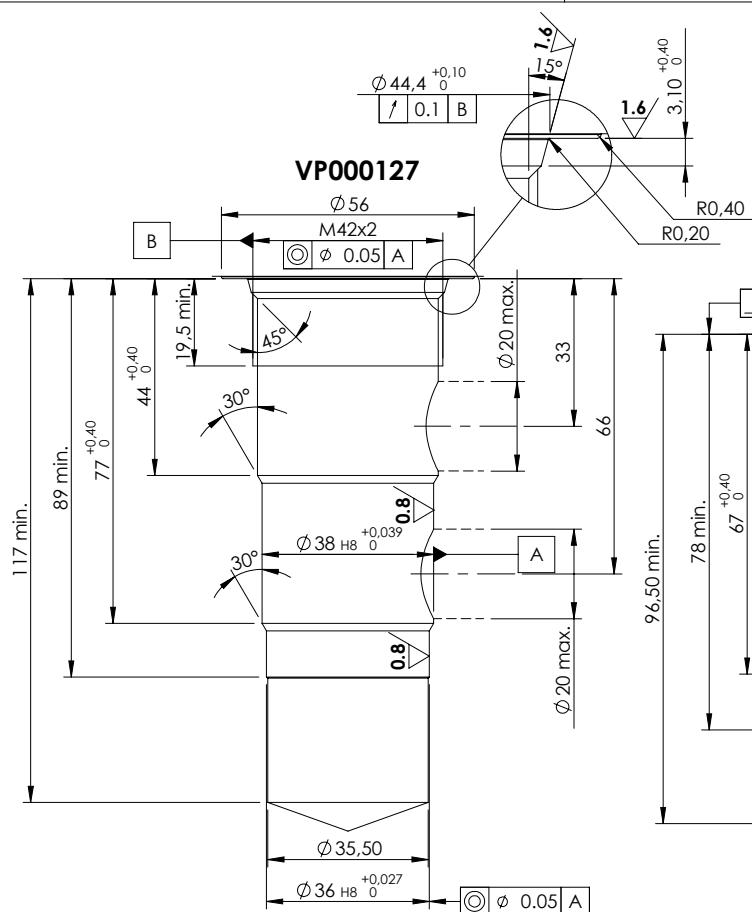

General Tolerances:


ϕ	0.03
$\perp$	0.02

SPECIAL CAVITIES

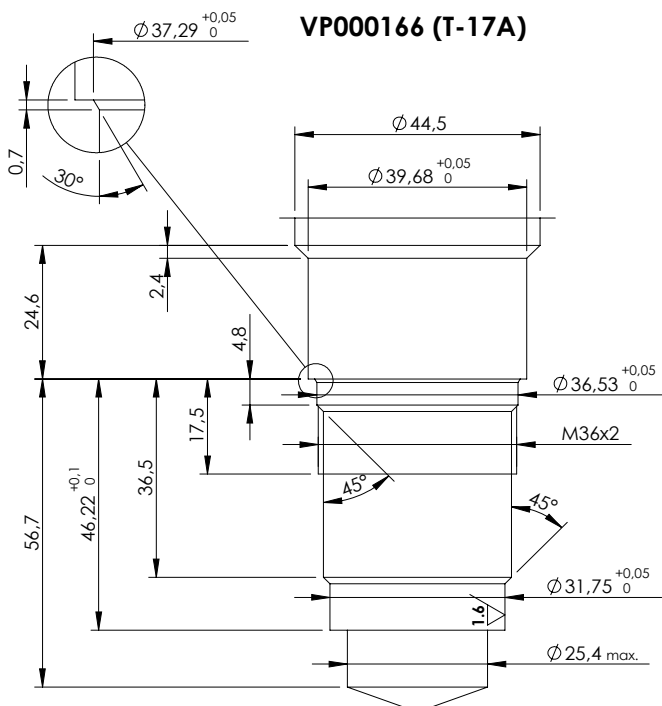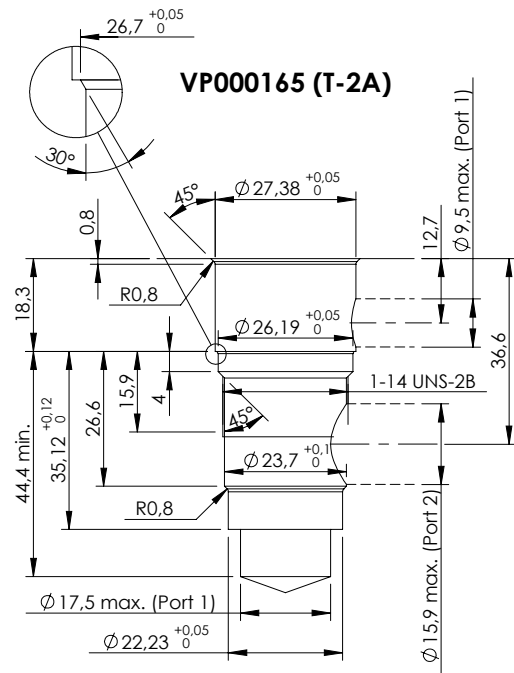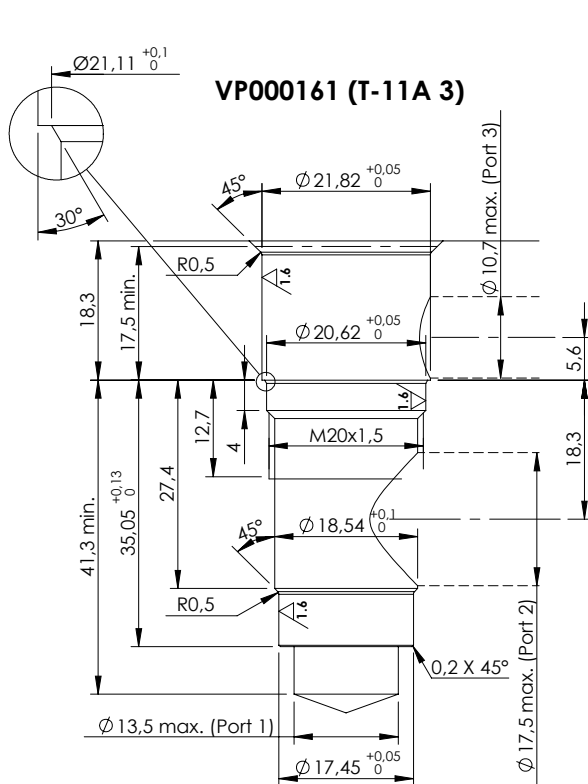

VP000174


Cavity SAE-10-3N

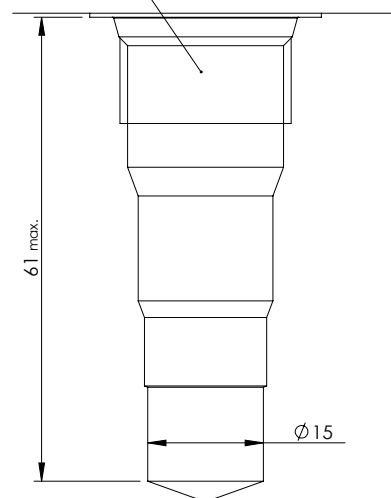


General Tolerances:

	0.03
	0.02

VP000180

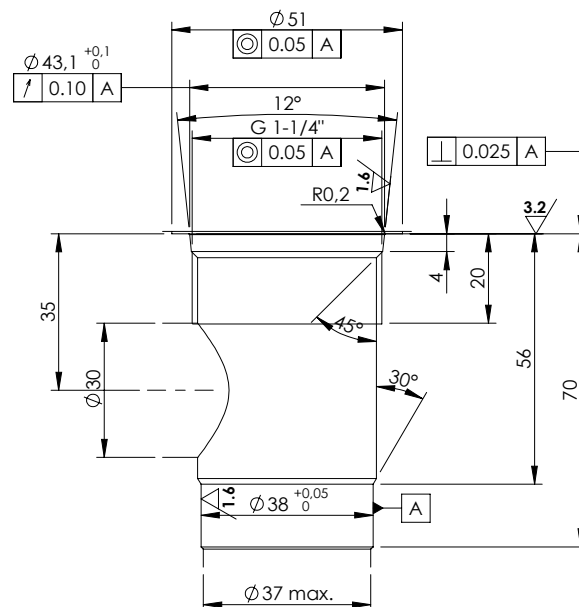


Cavity SAE-08-2N VP000193

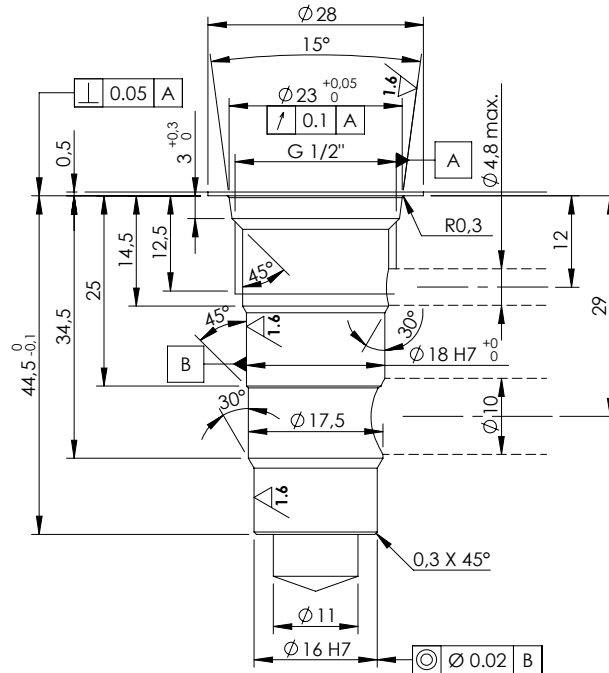


	0.03
	0.02


VP000202




VP000204

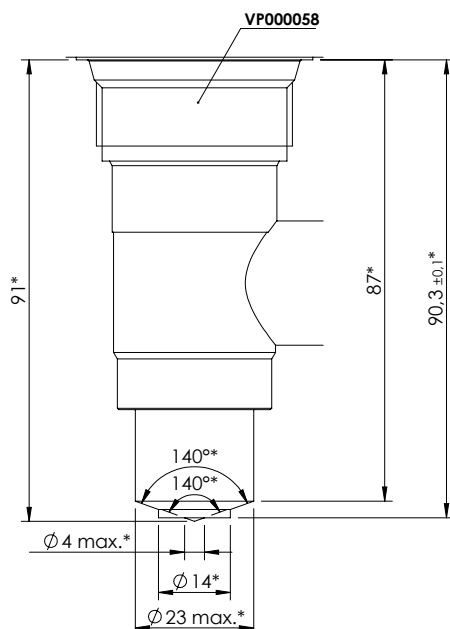


VP000216

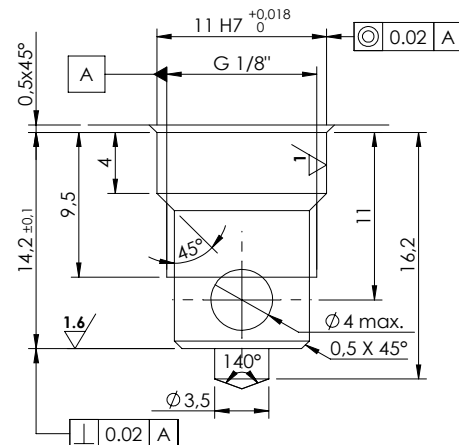

VP000249

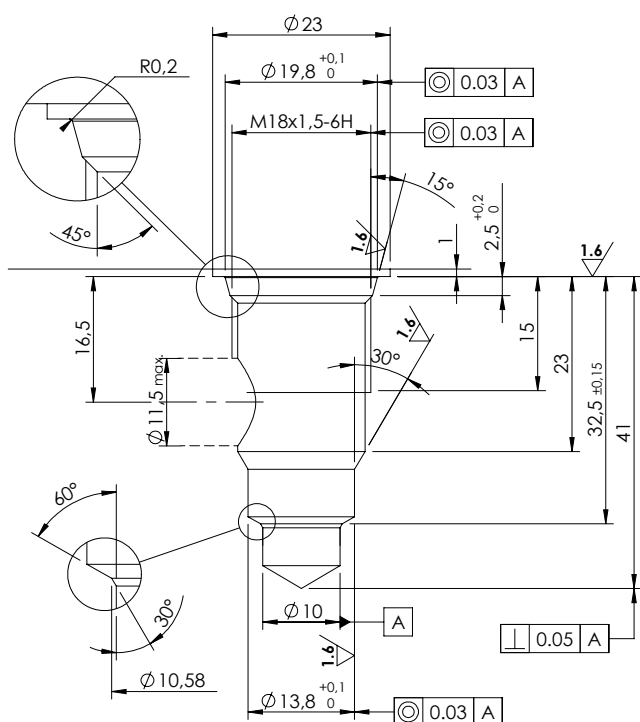

VP000250

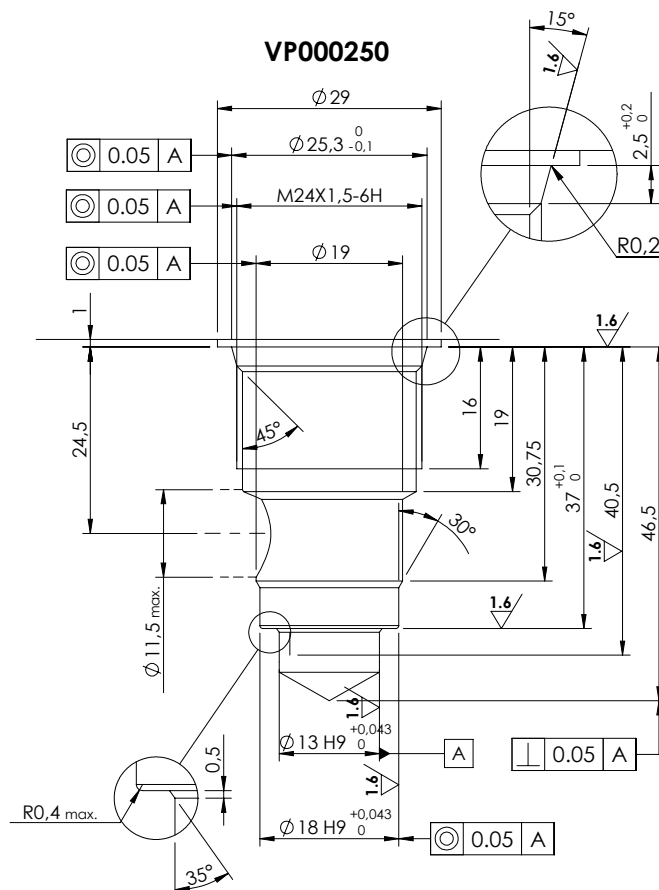


General Tolerances:




SPECIAL CAVITIES


VP000307




VP000309




VP000310

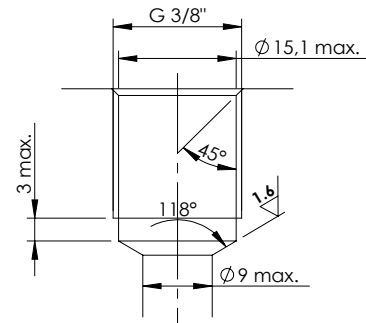


VP000311

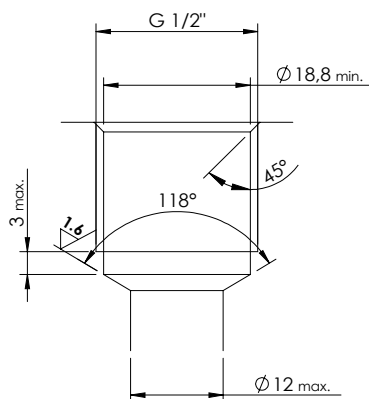


VP000312

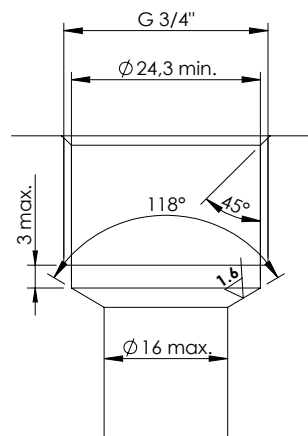

VP000314

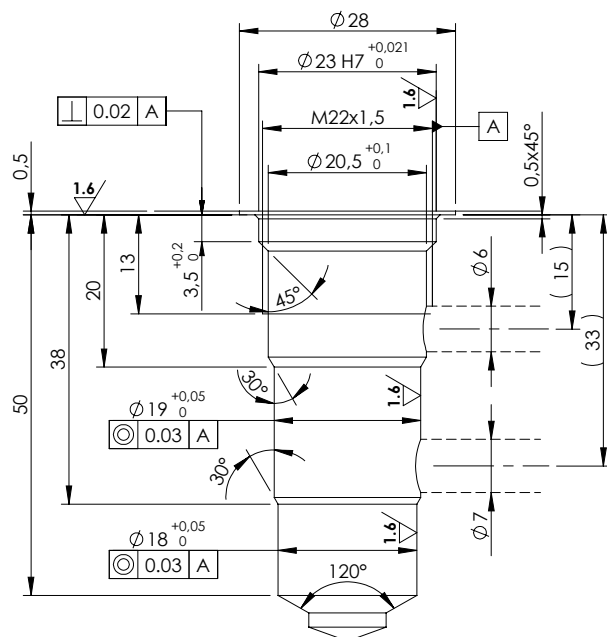

VP000330


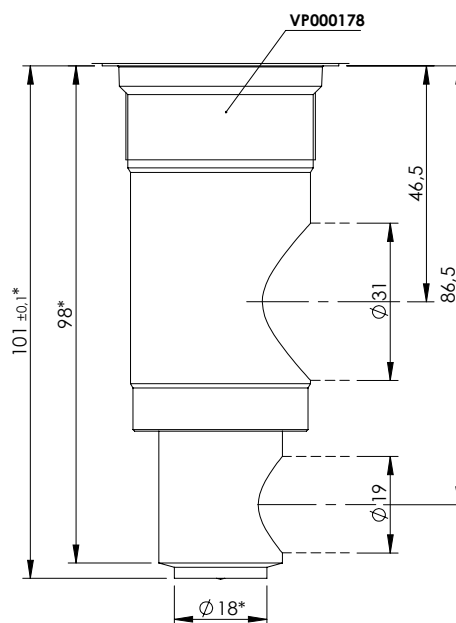


General Tolerances:



⊙ 0.03
⊥ 0.02

SPECIAL CAVITIES


VP000338

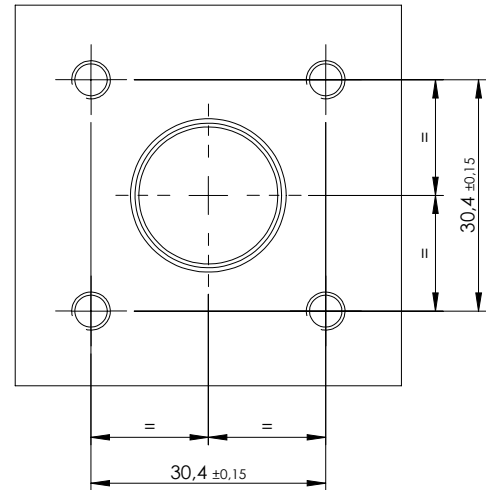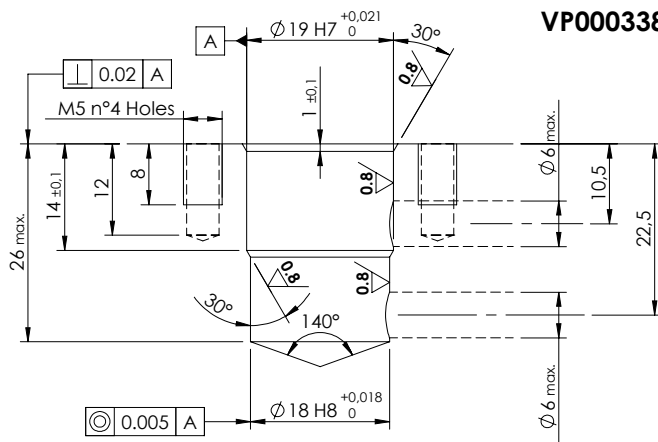


VP000371

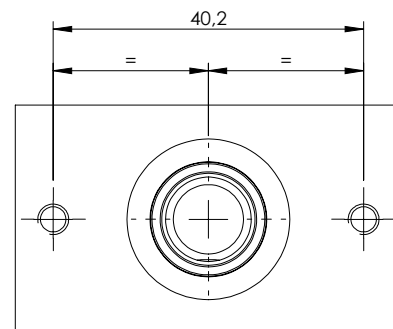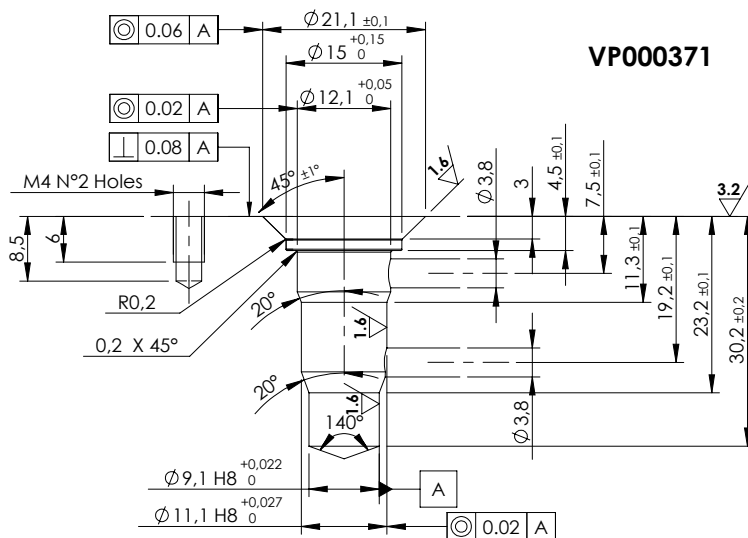

VP000388

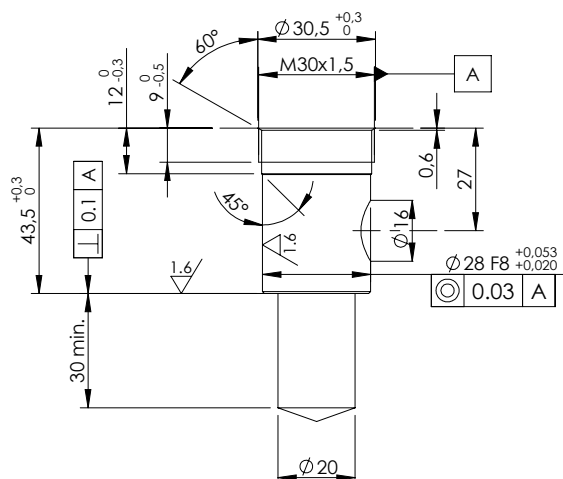


VP000445

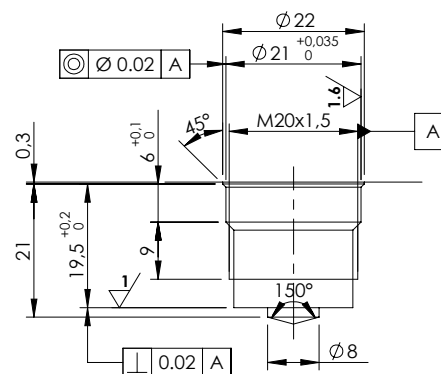


General Tolerances: $\sqrt{0.03}$
 $\sqrt{0.02}$

VP000555

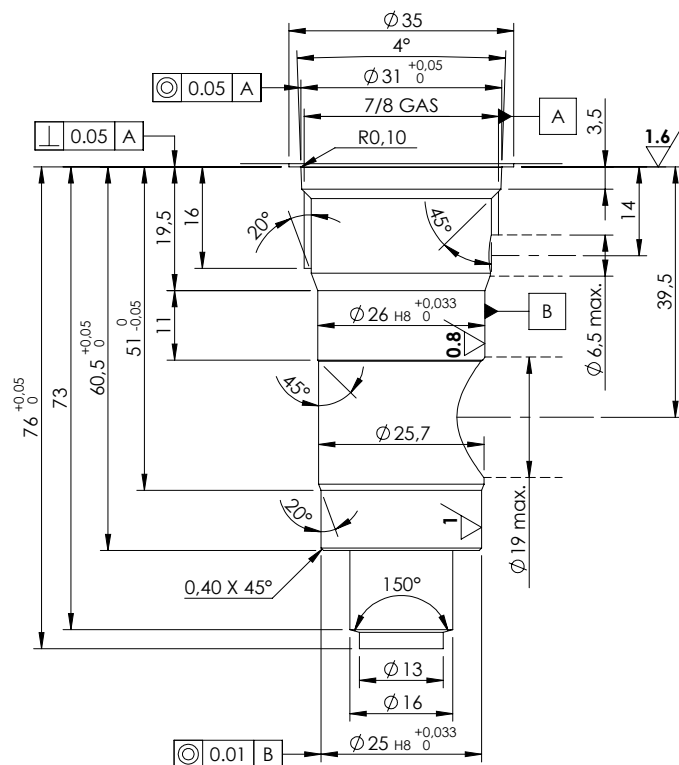

General Tolerances:

	0.03
	0.02

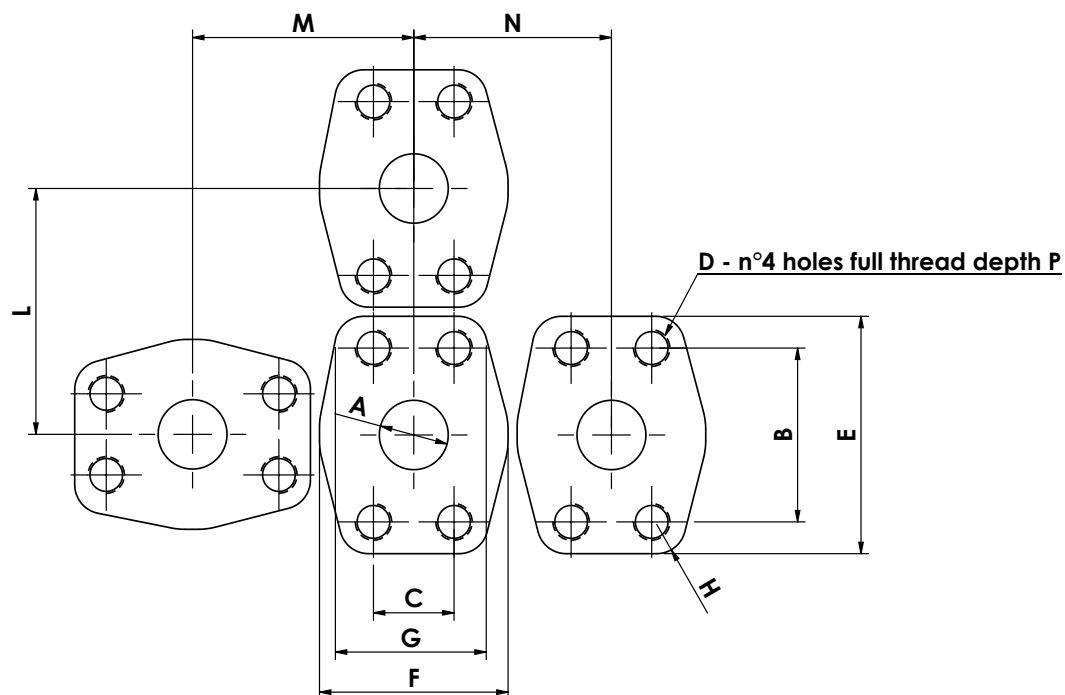TECHNICAL DATA
SAE FLANGE

FLANGE SAE 3000 PSI (MEDIUM PRESSURE)

		1/2	3/4	1"	1" 1/4	1" 1/2
A	∅ max.	13	19	25,5	32	38
B	-	38,1	47,6	52,4	58,7	69,9
C	-	17,5	22,2	26,2	30,2	35,7
D	unc-2B	5/16-18	3/8-16	3/8-16	7/16-14	1/2-13
	metric	M8	M10	M10	M10	M12
E	-	54	65	70	79	94
F	-	46	52	59	73	83
G	min.	33	41	48	54	64
H	radius	8	9	9	10	12
L	min.	56	68	72	82	96
M	min.	52	61	67	78	90
N	min.	49	55	61	75	85
P	min. mm	24	22	22	28	27

FLANGE SAE 6000 PSI (HIGH PRESSURE)

		1/2	3/4	1"	1" 1/4	1" 1/2
A	∅ max.	13	19	25,5	32	38
B	-	40,50	50,80	57,2	66,7	79,4
C	-	18,2	23,80	27,8	31,80	36,50
D	unc-2B	5/16-18	3/8-16	7/16-14	1/2-13	5/8-11
	metric	M8	M10	M12	M14	M16
E	-	56	71	81	95	113
F	-	48	60	70	78	95
G	min.	38	48	54	60	70
H	radius	8	10	12	14	17
L	min.	59	75	84	99	116
M	min.	56	70	80	90	108
N	min.	53	66	75	83	101
P	min. mm	21	24	27	25	35